


DATA SHEET - TEHNIČNI LIST

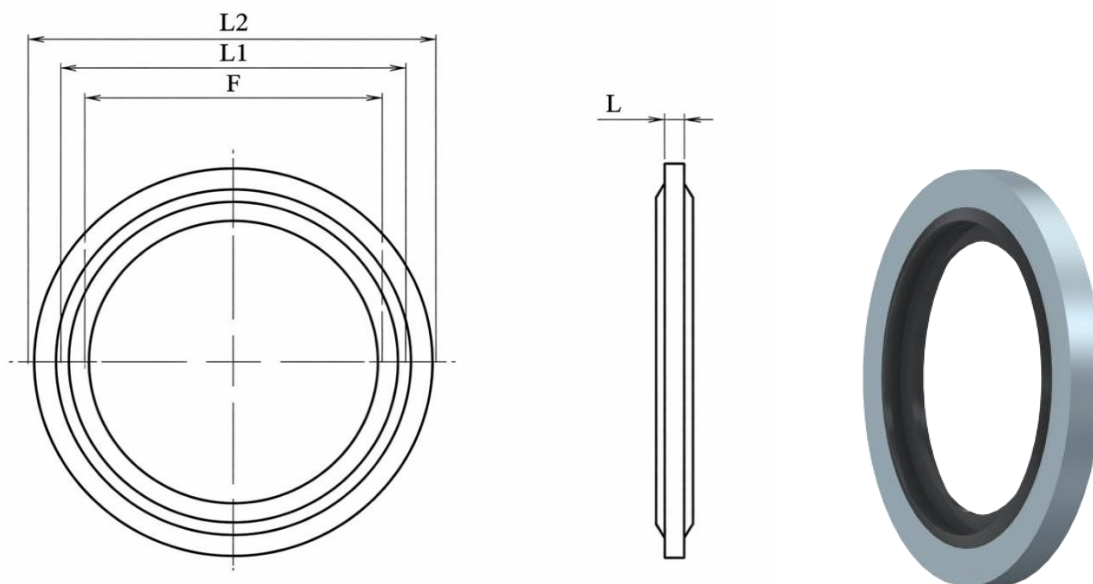

	R1	 (bar)	L	L1	L2	F	 (Kg)
	M6X1	650	1	6,7	10	4.70	0,0002
	M8x1	750		8,7	13	6.40	0,001
	M10x1	810		10,7	16	8.05	0,0011
89145	M12x1.5	750	1,5	12,7	18	9.73	0,0014
89146	M14x1.5	900		14,7	22	11.38	0,0023
89147	M16x1.5	840		16,7	24	13.41	0,0025
89148	M18x1.5	760		18,7	26	14.76	0,0029
89149	M20x1.5	690		20,7	28	16.76	0,003
89150	M22x1.5	660		22,7	30	18.74	0,0056
89151	M24x1.5	630	2	24,7	32	20.11	0,0044
	M26x1.5	630		26,7	35	22.30	0,006
	M27X1,5	650		27,2	36	23.30	0,0027
	M30x2	500		31	39	25.70	0,0068
	M36x2	500		36,7	46	31.10	0,025
	M42x2	500	3	42,7	53	36.50	0,016
	M48X2	480		48,7	59	41.90	0,018

Kovina: ogljikovo jeklo AISI 1008 -1010

Tesnilo: NBR 85 +/- 5 Sh A

Površinska obdelava: cinkova plošča (Cr3)

Delovna temperatura: -30°C to +100°C



Materials Metal: carbon steel AISI 1008 -1010

Seal: NBR 85 +/- 5 Sh A

Surface treatment: zinc plate (Cr3)

Working temperature From -30°C to +100°C

